arXiv:1207.1043v1 [quant-ph] 4 Jul 2012

Local parity approach to scattering in one dimension

P. A. Kalozoumis,[1,*] C. Morfonios,[2] F. K. Diakonos,[1] and P. Schmelcher[2]
[1] *Department of Physics, University of Athens, GR-15771 Athens, Greece*
[2] *Zentrum für Optische Quantentechnologien, Universität Hamburg,*
Luruper Chaussee 149, 22761 Hamburg, Germany

(Dated: July 5, 2012)

The impact of local symmetries on the transport properties of one-dimensional aperiodic arrays of potential barriers is explored. We show that weak commutation of combined local parity operations with the Hamiltonian induces states which either possess definite local parity and zero current or are totally transmitting with their probability density following the local symmetries of the potential. Our findings are illustrated through a construction principle for barrier arrays with prescribed transport features.

PACS numbers: 03.65.-w, 73.40.Gk, 03.65.Xp, 73.63.Hs

Introduction.—Symmetries set the grounds on which physical systems are treated, their ubiquitous presence on all scales dictating the form of the developed theory as well as experimental observation and analysis. Global spatial symmetry, though, in most cases pertains exactly to structurally simple systems and idealized models, while its absence in realistic situations often implies their statistical treatment [1]. To quantify situations of approximate symmetry, measures of symmetry [2, 3] have been proposed, which reflect the degree to which it is fulfilled under specific operations. In the generic case, symmetry of a system under spatial transformations is globally broken, but retained on a local scale [4], such that the associated invariance of physical properties affects its behavior beyond a mean description [5]. Local symmetries can be present by design, as in mesoscopic transport devices [6] or other artificial experimental setups [7], but also naturally inherent in structurally complex systems, like large molecules [8], quasi-crystals [9] or even disordered matter [10]. In view of the intensive exploration of such systems, the need for a rigorous theoretical treatment which addresses local regularities, but incorporates the global composite structure, becomes evident.

In this letter we make a step in this direction, investigating the impact of local symmetries in the transport properties of globally non-symmetric systems. Considering scattering in one dimension (1D), any spatial symmetry transformation can be reduced to combinations of coordinate inversions within subintervals of configuration space, which we refer to as *local parity* (LP) transformations.

Utilizing non-uniform arrays of arbitrary potential barriers, we show how LP is related to the transport properties of stationary scattering states with symmetric or asymmetric asymptotic conditions (SAC or AAC): under conservation of LP, the total or reflected probability current vanishes, respectively. The latter corresponds to totally transmitting resonances (TTRs) in the non-symmetric system which we classify with respect to the symmetries of the scattering state profile. Applying the concept of LP explicitly to the analytically tractable case of rectangular barriers, we demonstrate a construction principle for aperiodic devices with prescribed transport properties.

Local parity.—Let us first introduce the LP operation, which performs the usual parity transform in a finite subdomain $\mathcal{D}$ of configuration space (of the x-axis in 1D) and acts in the remaining part, up to a sign, as the identity operator, in order to maintain spectral equivalence to global parity. The single LP operator $\hat{\Pi}^{\mathcal{D}}_{\pm} \equiv \hat{\Pi}^{L}_{\alpha,\pm}$ is parametrized by the location of its inversion point α and the size L of $\mathcal{D}$, in terms of which it is defined by its action on an arbitrary function $f(x)$ as

$$\begin{aligned}\hat{\Pi}^{L}_{\alpha,\pm} f(x) = f(2\alpha - x)\;\Theta(L/2 - |x-\alpha|)\\ \pm f(x)\;\Theta(|x-\alpha| - L/2),\end{aligned} \qquad (1)$$

with eigenvalues $\lambda_{\pm} = \pm 1$, where Θ denotes the Heaviside step function. Two different LP transforms $\hat{\Pi}^{\mathcal{D}_1}_{\pm}$, $\hat{\Pi}^{\mathcal{D}_2}_{\pm}$ commute if the associated domains do not overlap, $\mathcal{D}_1 \cap \mathcal{D}_2 = \oslash$. Subsequent application of $N = N_+ + N_-$ non-overlapping single LP transforms, where $N_{\pm}$ is the number of transforms with parity $\lambda_n = \pm 1$, thus corresponds to a total LP operator $\hat{\Pi}^{\mathrm{tot}}_{\lambda} = \prod_{n=1}^{N} \hat{\Pi}^{\mathcal{D}_n}_{\lambda_n}$ with eigenvalue $\lambda = (-1)^{N_-}$ depending on the number of odd transformations.

The link between local symmetry and transport properties is provided by the commutation of the Hamiltonian $\hat{H} = \hat{k}^2 + \hat{V}$ (using units $\hbar = 2m = 1$) with $\hat{\Pi}^{\mathrm{tot}}_{\lambda}$, and thereby with each $\hat{\Pi}^{\mathcal{D}_n}_{\lambda_n}$. For a potential $V(x)$ which is mirror symmetric within the subdomains $\mathcal{D}_n = [\alpha_n - L_n/2, \alpha_n + L_n/2]$, the action of the associated commutators reads

$$\begin{aligned}[\hat{H}, \hat{\Pi}^{\mathcal{D}_n}_{\alpha_n,\pm}] f(x) &= \left(f(2\alpha_n - x) \mp f(x)\right) \Delta'(x)\\ &\quad -4\,\left(f'(2\alpha_n - x) \pm f'(x)\right) \Delta(x)\end{aligned} \qquad (2)$$

where $\Delta(x) = \delta(x - \alpha_n - L_n/2) - \delta(x - \alpha_n + L_n/2)$ and the prime denotes x-differentiation. Note that, although $\hat{V}$ clearly commutes with $\hat{\Pi}^{\mathcal{D}_n}_{\lambda_n}$, the kinetic term in $\hat{H}$ leads to non-vanishing boundary terms, ordered in degree of singularity. The commutation is then manifest in a weak sense, that is, subsequent action of $\hat{H}$ and each $\hat{\Pi}^{\mathcal{D}_n}_{\pm}$ on $f(x)$ is independent of their order, only if the boundary conditions

$$\begin{aligned}f(\alpha_n - L_n/2) &= \pm f(\alpha_n + L_n/2)\;;\\ f'(\alpha_n - L_n/2) &= \mp f'(\alpha_n + L_n/2)\;,\end{aligned} \qquad (3)$$

are fulfilled for each $n = 1, 2, ..., N$.

Scattering.—We now explore the consequences of local symmetries in 1D scattering, based on the derived conditional commutation of $\hat{H}$ with $\hat{\Pi}_{\lambda}^{\mathrm{tot}}$. The generic setup is defined by the real static potential

$$V(x) = \sum_{n=1}^{N_{\mathcal{S}}} V_n(x)\ \Theta(L_n/2 - |x - \alpha_n|) \tag{4}$$

describing an array of $N_{\mathcal{S}}$ non-overlapping scatterers of widths L_n, centered at and symmetric about $x = \alpha_n$ ($V_n(2\alpha_n - x) = V_n(x)$). SAC or AAC are imposed on the stationary scattering state $|\psi_k\rangle$ with plane waves $e^{\pm ikx} = \langle x|\pm\rangle$ of energy $E = k^2$ incident on the left and right, or only on the left, of the scattering region, respectively ($k > 0$). The corresponding asymptotic ingoing amplitudes $\left(\begin{smallmatrix}1\\1\end{smallmatrix}\right)$ or $\left(\begin{smallmatrix}1\\0\end{smallmatrix}\right)$ of $|\psi_k\rangle$ in $|\pm\rangle$-space are scattered off the potential into the outgoing ones by the S-matrix

$$S = \begin{pmatrix} r & t \\ t & \tilde{r} \end{pmatrix} \equiv e^{i\vartheta} \begin{pmatrix} \sqrt{R}e^{i\delta} & \sqrt{T} \\ \sqrt{T} & -\sqrt{R}e^{-i\delta} \end{pmatrix} \tag{5}$$

which is unitary by momentum (probability current) conservation and symmetric due to the time-reversal invariance of our system. $T = |t|^2 = 1 - |r|^2 = 1 - R$ is the transmission probability, which is measurable for a setup under AAC.

Zero-current states.—Consider first the scattering setup under SAC, with wave function $\psi_k^<(x) = e^{ikx} + (t + r)e^{-ikx}$ on the left ($x < \alpha_1 - L_1/2$) and $\psi_k^>(x) = e^{-ikx} + (t + \tilde{r})e^{ikx}$ on the right ($x > \alpha_{N_{\mathcal{S}}} + L_{N_{\mathcal{S}}}/2$) of the array. A realization of this could be thought of as a split particle beam brought to interference at the potential region. We now imply the conservation of LP in the subdomains $\mathcal{D}_n = [\alpha_n - \frac{L_n}{2}, \alpha_n + \frac{L_n}{2}]$ ($n = 1, 2, \ldots, N_{\mathcal{S}}$) of the scatterers and the subdomains $\bar{\mathcal{D}}_{\bar{n}} = [\alpha_{\bar{n}} + \frac{L_{\bar{n}}}{2}, \alpha_{\bar{n}+1} - \frac{L_{\bar{n}+1}}{2}]$ ($\bar{n} = 1, 2, \ldots, N_{\mathcal{S}} - 1$) between them, with $\lambda_n, \lambda_{\bar{n}} = +1$ or -1 for even or odd transformations. This imposes the conditions (3) with $f(x) \equiv \psi_k(x)$, $N = 2N_{\mathcal{S}} - 1$, on the total wave function at adjacent subdomain boundaries, and thereby at the left and right boundary of the potential by induction:

$$\begin{aligned} \psi_k(\alpha_1 - L_1/2) &= (-1)^{N_-}\psi_k(\alpha_{N_{\mathcal{S}}} + L_{N_{\mathcal{S}}}/2)\ ; \\ \psi_k'(\alpha_1 - L_1/2) &= -(-1)^{N_-}\psi_k'(\alpha_{N_{\mathcal{S}}} + L_{N_{\mathcal{S}}}/2)\ , \end{aligned} \tag{6}$$

ψ_k here being a common eigenfunction of $\hat{H}$ and $\hat{\Pi}_{\lambda}^{\mathrm{tot}}$.

These in turn lead to the following conditions for the energies of the LP eigenfunctions and for the form of the S-matrix:

$$e^{2ikx_c} = (-1)^{N_-}\ ; \qquad r = \tilde{r}\ , \tag{7}$$

where $x_c = (\alpha_1 - \frac{L_1}{2} + \alpha_{N_{\mathcal{S}}} + \frac{L_{N_{\mathcal{S}}}}{2})/2$ is the center of the array. This means that, at momenta $k_c^{(n)} = n\pi/2x_c$, $n \in \mathbb{N}$, for a given location x_c, the *locally* symmetric array behaves as a *globally* symmetric one with respect to its asymptotic transport properties. In particular for the setup under SAC, at these energies the probability density current $j_k = 2k(1 - |t + r|) = -2k(1 - |t + \tilde{r}|)$ vanishes due to the unitarity condition $S^\dagger S = I$ with $r = \tilde{r}$ ($\neq 0$ in general). This can also be understood from the fact that $r = \tilde{r}$ yields a phase difference $\delta = \pi/2$ between t and r, as seen from Eq. (5), so that $|t + r| = \sqrt{|t|^2 + |r|^2} = 1$. The zero-current states for SAC connect the concept of LP to a transport observable, in a situation where the transmission coefficient T is ambiguous due to the indistinguishability of reflected and transmitted wave amplitudes in the asymptotic regions. LP conservation, and thus j_k, is sensitive to the relative phases of the ingoing amplitudes (or, equivalently, to the positioning of the array) at a fixed energy, thus implementing a 1D interferometric setup based on probability current. Examples of LP-conserving zero-current states are shown in Figs. 1 and 3 for the case of rectangular barrier arrays (see below).

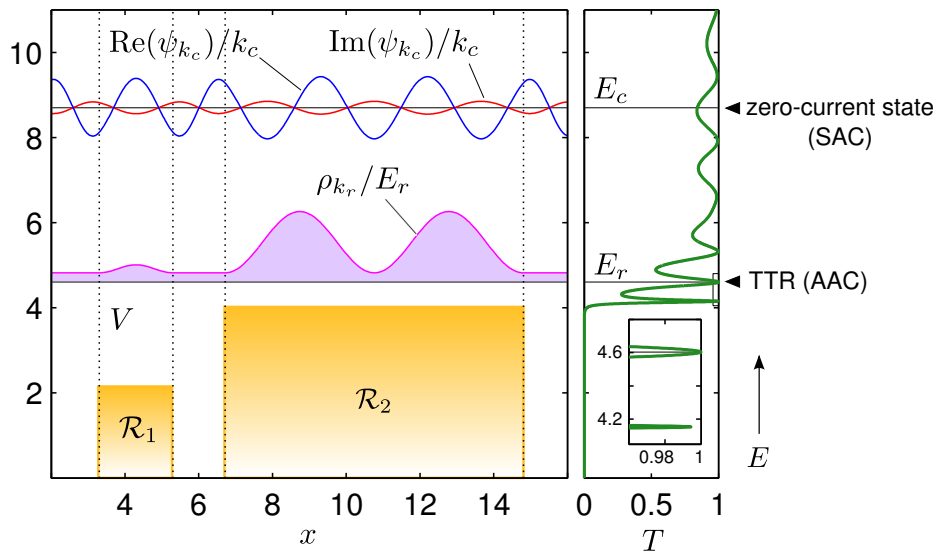

FIG. 1. Transmission spectrum of the simplest LP-symmetric barrier setup, with scaled $\psi_{k_c}(x)$ and $\rho_{k_r}(x)$ shown for a zero-current state ($E_c = 8.70$) under SAC and a TTR ($E_r = 4.60$) under AAC, respectively.

Totally transmitting resonances.—Keeping the LP-sensitive current j_k as an observable, we now turn to the case of AAC, which are most common in transmission measurements. With incoming amplitudes $\left(\begin{smallmatrix}1\\0\end{smallmatrix}\right)$ in $|\pm\rangle$-space, that is, $\psi_k^<(x) = e^{ikx} + re^{-ikx}$ and $\psi_k^>(x) = te^{ikx}$, the symmetry in the scattering problem is broken explicitly, so that $\psi_k(x)$ will clearly not conserve LP under AAC. On the other hand, the (spatially independent) current is now directly connected to the probability density of the transmitted wave: $j_k = k|\psi_k^>|^2 = kT$. We therefore seek a remnant of the conserved LP in the spatially resolved probability density $\rho_k(x) = |\psi_k(x)|^2$ of the scattered particle with AAC. To this aim, we repeat the arguments leading to conditions (3), setting $f(x) = \rho_k(x)$ and restricting the LP operation to even transformations ($\lambda_n = +1$ or $N_- = 0$), since $\rho_k(x) \geq 0$ by definition, which leads to the corresponding conditions by induction through the array:

$$\begin{aligned} \rho_k(\alpha_1 - L_1/2) &= \rho_k(\alpha_{N_{\mathcal{S}}} + L_{N_{\mathcal{S}}}/2)\ ; \\ \rho_k'(\alpha_1 - L_1/2) &= -\rho_k'(\alpha_{N_{\mathcal{S}}} + L_{N_{\mathcal{S}}}/2)\ . \end{aligned} \tag{8}$$

To see the consequences of the even LP of $\rho_k(x)$ within each of the array subdomains, we impose the above conditions on the (squared) amplitudes connected by the S-matrix. This yields

$$\text{(a)} \qquad r = 0 \qquad \text{or} \qquad \text{(b)} \qquad r = -e^{2ik(\alpha_1 - L_1/2)} \tag{9}$$

corresponding to total transmission ($T = 1$) or total reflection ($R = 1$), respectively. Concentrating on the former case [11], we thus conclude the following: The scattering state under AAC exhibits a TTR if and only if its probability density is non-zero everywhere and LP symmetric with respect to the local symmetry axes of the potential. We will demonstrate examples of TTRs in rectangular barrier arrays without global parity symmetry below.

This result generalizes the relation between resonant transmission and symmetric probability density, from globally to locally symmetric potentials, in a conceptually transparent way. For a single symmetric scatterer, an isolated [12] resonance at momentum $k = k_r$ can be shown to have symmetric $\rho_k(x)$ and, therefore, be totally transmitting, by expanding the propagator of the wave function into resonant global parity eigenstates [13]. This confirms the intuitive symmetry argument, that the (observable) probability density of a totally transmitting state cannot reveal the direction of incidence in a reflection symmetric potential. The symmetry of resonant states is not directly evident, though, if different such (symmetric) scatterers are connected into a non-symmetric array. Only when treated *separately*, each symmetric scatterer could be argued to transmit resonantly at the same k_r with globally symmetric $\rho_k(x)$. This would then remain unaffected by implementation into an array, since only phase-shifted plane waves propagate in the intervening potential-free regions. Nevertheless, this argument does not carry over to the case of SAC, where counterpropagating waves interfere between the scatterers. Moreover, at a TTR not all local symmetries of the potential are necessarily obeyed by the resonant probability density, as we will see in the following. The proposed concept of LP treats the non-symmetric system globally while addressing its local symmetries in arbitrary subdomains, and applies uniformly to scattering under SAC or AAC.

Rectangular barrier arrays.—With the general considerations above applying to arbitrary (smooth) potentials, we now demonstrate the LP induced zero-current and TTR states in the analytically solvable case of rectangular barrier arrays, that is, $V_n(x) = V_n^0$, $n = 1, 2, ..., N_{\mathcal{S}}$, in Eq. (4). The potential strength V_n^0, width L_n and location α_n of the n-th barrier are freely adjustable. The barriers themselves and the regions between them define the smallest possible subdomains with local symmetry and mutually different potential strengths. Relying on regularities at the level of barriers, though, local symmetries can also be realized on larger scales, which is generally the prevalent case in natural complex structures or fabricated devices.

We therefore group the $N_{\mathcal{S}}$ barriers into $N_{\mathcal{R}} \leq N_{\mathcal{S}}$ reflection symmetric *resonators* $\mathcal{R}_l$ ($l = 1, 2, ..., N_{\mathcal{R}}$), separated by regions $\bar{\mathcal{D}}_{\bar{l}}$ ($\bar{l} = 1, 2, ..., N_{\mathcal{R}} - 1$) of zero potential. The resonators are of three types with respect to the TTRs they support: (I) a single barrier, supporting above-barrier resonances (ABRs), (II) a homogeneous array of identical equidistant barriers, supporting tunneling resonances and ABRs, or (III) an inhomogeneous barrier array, supporting isolated TTRs for appropriate combinations of barrier strengths and widths [12].

For any resonator decomposition, the $|\pm\rangle$-amplitudes along the array are determined by matching the wave function at the $2N_{\mathcal{S}}$ interfaces, and connected by the single-barrier unimodular transfer matrices $M_n(k; V_n^0, L_n)$. The total transfer matrix is then advantageously given by the (ordered) matrix product

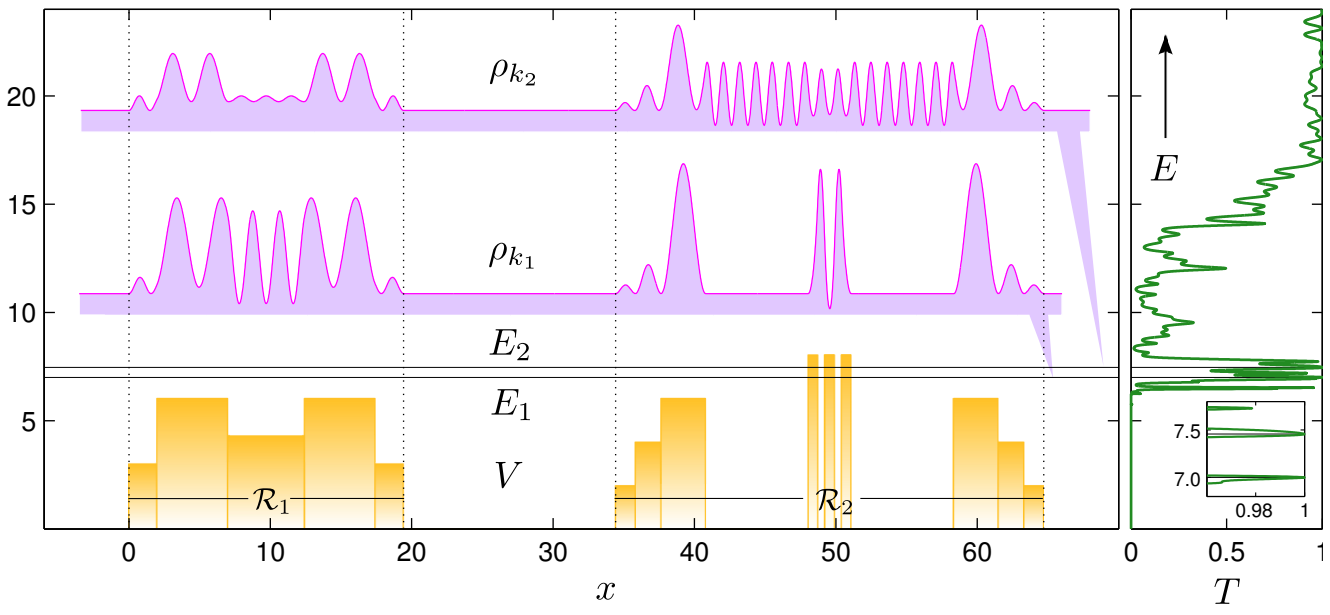

FIG. 2. Setup of two large resonators $\mathcal{R}_1$ (with $n_1 = 5$ barriers) and $\mathcal{R}_2$ ($n_2 = 9$), exhibiting two close (tunneling) TTRs at $E_1 = 7.00$ and $E_1 = 7.46$, with corresponding probability densities shown for AAC.

$$M = \begin{pmatrix} w & z \\ z^* & w^* \end{pmatrix} = \prod_{n=1}^{N_{\mathcal{S}}} M_n(k; V_n^0, L_n) \qquad (10)$$

connecting the amplitudes of $\psi_k^>$ on the right of the array to those of $\psi_k^<$ on the left, where the matrix elements are related to the reflection and transmission amplitudes of the S-matrix by $w = (t^*)^{-1}$ and $z = -r^*(t^*)^{-1}$.

Conditions $r = \tilde{r}$ and $r = 0$ for zero current $k = k_c$ (SAC) and TTRs at $k = k_r$ (AAC) are now expressed as an imaginary or zero transfer matrix element z, respectively: $\mathrm{Re}(z) = 0$ (SAC) or $z = 0$ (AAC). In practice, though, conditions (3), with $f(x) = \psi_k(x)$ or $\rho_k(x)$, are imposed directly at the boundaries of the subdomains $\mathcal{D}_l$ with LP, which contain the resonators $\mathcal{R}_l$, and of the $\bar{\mathcal{D}}_{\bar{l}}$ between them. TTRs then resonate within and between the resonators for a specific k_r. The decomposition of the array into resonators in general changes for different resonant energies, according to the local symmetries of the corresponding probability density $\rho_{k_r}(x)$. If the system resonates within smaller constituents of a resonator, then we refer to the resonance as *reducible*. The invariance of a given resonant energy under interchange or translation of such constituents implies their independence within the total system [14], in terms of transmission. In this sense also resonators are independent constituents of the array at TTRs.

The fulfillment of LP through the conditions imposed on the transfer matrix suggests a construction principle for the design of aperiodic arrays with TTRs at prescribed energies, the basic steps being as follows: First, we calculate the element $z_l(k; \{V_i^{0(l)}\}, \{L_i^{(l)}\})$ of the transfer matrix M_l for each resonator $\mathcal{R}_l$ containing n_l barriers of strengths $V_i^{0(l)}$ and widths $L_i^{(l)}$, $i = 1, 2, ..., n_l$. We then impose the conditions (3) for even LP of $f(x) = \rho_k(x)$ within each resonator, leading to a set of $2N_{\mathcal{R}}$ real algebraic equations for given resonant momentum k_r,

$$z_l(k_r; \{V_l^{0(i)}\}, \{L_l^{(i)}\}) = 0 \ , \quad l = 1, 2, ..., N_{\mathcal{R}}. \qquad (11)$$

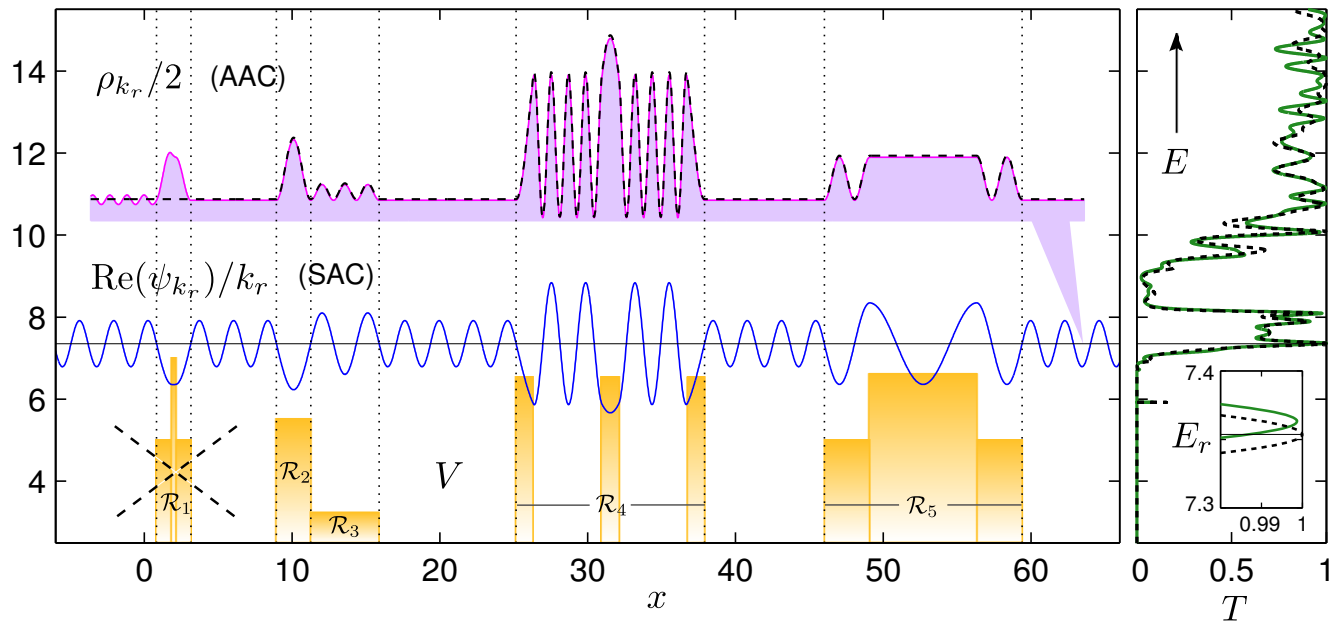

FIG. 3. Multi-barrier array decomposed into $N_{\mathcal{R}} = 5$ resonators (solid lines), exhibiting a zero-current state (with shown $\mathrm{Re}(\psi_{k_c})$ for SAC) at $E_c = k_c^2 = 7.354$. If $\mathcal{R}_1$ is removed (dashed lines), the state becomes a TTR (with shown ρ_{k_c} for AAC) at the same energy.

The $2\sum_{l=1}^{N_{\mathcal{R}}} n_l$ setup parameters can be uniquely determined only for $n_l = 1$, that is, each resonator being of type I. However, since generally $n_l \geq 1$, it is in principle possible to obtain TTRs at multiple energies, or, conversely, construct different aperiodic arrays which resonate at the same k_r. Note that, for the case of SAC, also the intervening potential-free regions need to be adjusted to conserve LP.

Representative setups.—Let us now discuss some examples which illustrate the above concepts and their implementation more explicitly, in order of increasing resonator number $N_{\mathcal{R}}$. Fig. 1 demonstrates the occurrence of a zero-current state and an irreducible TTR in the simplest case which breaks global parity, an asymmetric double barrier setup. As we see, the zero-current state has even LP in the barriers and odd LP between them. $T(E)$ displays a multi-ABR structure, but only the depicted peak corresponds to a TTR state (see inset).

Fig. 2 shows again a setup of $N_{\mathcal{R}} = 2$ resonators, but of a more complex structure, supporting two energetically close TTRs. ρ_{k_2} (at E_2) is irreducible in both resonators, while ρ_{k_1} (at E_1) is irreducible in $\mathcal{R}_1$ but reducible in $\mathcal{R}_2$, where it varies only within the barrier regions (with flat $\rho(x)$ indicating a forward propagating wave only). We point out that the setup remains resonant for an arbitrary combination of $\mathcal{R}_1$ and $\mathcal{R}_2$, with repeated corresponding patterns in $\rho_k(x)$, which thus resembles an extended system with structural complexity.

In Fig. 3 a zero-current state becomes a TTR at the same energy by removing the first resonator $\mathcal{R}_1$ from a $N_{\mathcal{R}} = 5$ array. The TTR is reducible within $\mathcal{R}_3$ and irreducible in $\mathcal{R}_2, \mathcal{R}_4, \mathcal{R}_5$, while more localized within $\mathcal{R}_4$. Notice that this TTR is independent of the width of the central barrier in $\mathcal{R}_5$, within which the wave propagates only forwardly with constant $\rho_{k_R}(x) > 1$. This might be utilized for the flexible design of efficiently transmitting non-symmetric devices.

In Fig. 4 we investigate a (finite) periodic array with two defects in the form of alternate lattice cells. Without the defects, the transmission properties of the uniform array are determined by its unit cell [15], which also defines the scale of local symmetry. Due to coupling of the degenerate resonant levels of adjacent identical resonators, a uniform N-scatterer array exhibits $(N-1)$-fold split TTRs [15, 16], which saturate into transmission bands for larger N. As we see, the presence of aperiodicity [17] distorts the precursors of the energy bands [1, 18] and lowers the resonances in $T(E)$ from unity because of the induced asymmetry [6]. Nevertheless, the decomposition into resonators (particularly of type III) containing multiple barriers reveals the possibility of TTRs, as explained above, owing to the locally symmetric ρ_{k_r} of (irreducible) resonant states. This implies that identification of local symmetries on scales larger than the lattice cell provide a key for the description of structurally complex systems. Moreover, different LP axes (i.e. resonator decompositions) for the same setup correspond to different TTR levels; local symmetry considerations thus prove to be of fundamental importance in accessing and understanding the properties of non-uniform systems.

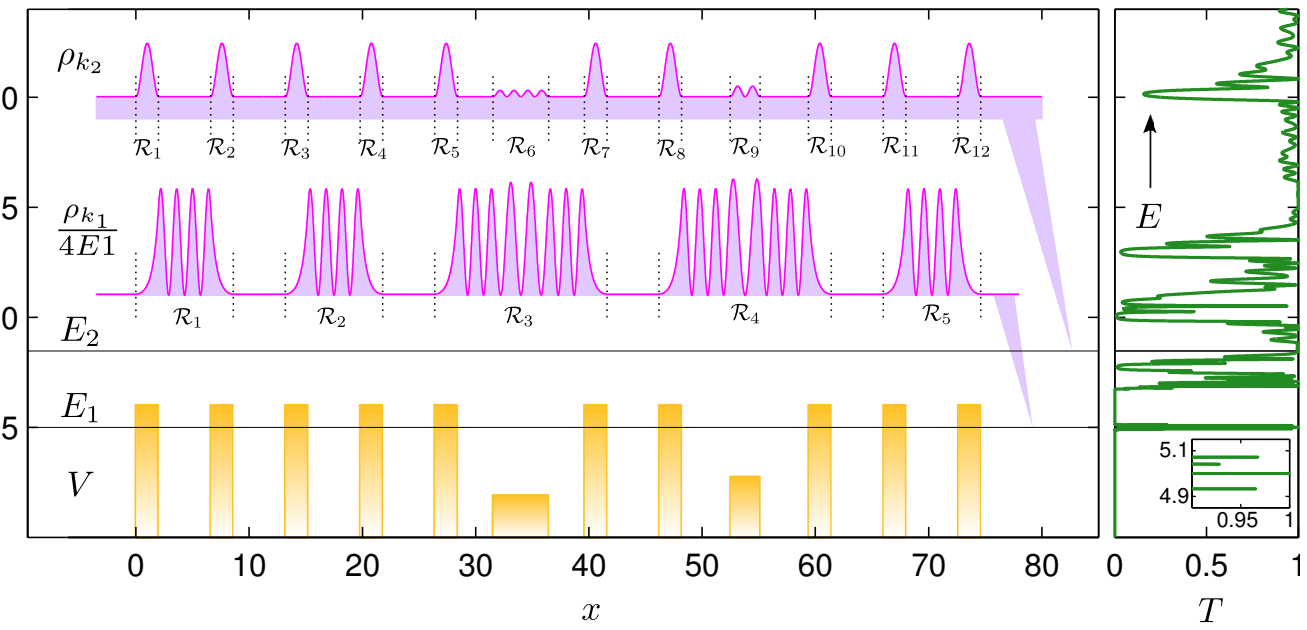

FIG. 4. Setup of $N_{\mathcal{S}} = 12$ rectangular barriers, two of which are deformed in width and strength. The array is decomposed into $N_{\mathcal{R}}^{(1)} = 5$ and $N_{\mathcal{R}}^{(2)} = 12$ resonators with respect to supported irreducible TTRs at energies $E_1 = 5.00$ and $E_2 = 8.47$.

Conclusions.—In conclusion, we have introduced the concept of local parity and revealed its impact on the transport properties of aperiodic 1D arrays of reflection symmetric scatterers. LP was shown to underly the emergence of zero-current states and totally transmitting resonances under imposed symmetric and asymmetric asymptotic conditions, respectively. Based on these results, a construction principle was developed for the flexible realization of mesoscopic devices with designed transport properties relying on their LP symmetries. The decomposition of globally non-symmetric arrays into different locally symmetric resonator units relates total transmission to symmetries of the probability density. This in turn demonstrates the importance of considering local order on different scales to understand the behavior of structurally complex systems in general. On the other hand, the reducibility of resonant states into subdomains of defined resonators links to the concept of independence among constituents of extended systems on symmetry grounds. The generalization of our approach to higher dimensions and different kinds of local symmetry transformations could provide a novel context for the analysis of complex systems based on fundamental principles.

Acknowledgments.—This research has been co-financed by the European Union (European Social Fund - ESF) and Greek national funds through the Operational Program "Education and Lifelong Learning" of the National Strategic Reference Framework (NSRF) - Research Funding Program: Heracleitus II. Investing in knowledge society through the European Social Fund.

---

[*] pkalozoum@phys.uoa.gr

[1] G.A. Luna-Acosta, F.M. Izrailev, N.M. Makarov, U. Kuhl and H.-J. Stöckmann, Phys. Rev. B **80**, 115112 (2009).
[2] H. Zabrodsky, S. Peleg, D. Avnir, J. Am. Chem. Soc. **114**, 7843 (1992).
[3] M. Pinsky, D. Casanova, P. Alemany, S. Alvarez, D. Avnir, C. Dryzun, Z. Kizner, A. Sterkin, J. Comput. Chem. **29**, 190 (2008).
[4] J. Echeverria, A. Carreras, D. Casanova, P. Alemany and S. Alvarez, Chem. Eur. J. **17**, 3359 (2011).
[5] G. Coupier, C. Guthmann, Y. Noat, and M. Saint Jean, Phys. Rev. E **71**, 046105 (2005).
[6] D. K. Ferry and S. M. Goodnick, *Transport in Nanostructures*, Cambridge University Press (1997)
[7] A.P. Alivisatos, Science **271**, 933 (1996).
[8] R. A. Pascal, J. Phys. Chem. A **105**, 9040 (2001); K. Grzeskowiak *et al* Biochemistry **32**, 8923 (1993).
[9] R. Lifshitz, Physica A **232** (1996); A-Li Chen, Yue-Sheng Wang and Chuanzeng Zhang, Physica B **407**, 324 (2012).
[10] P. Wochner *et al*, Proc. Natl. Acad. Sci. U.S.A. **106**, 11511 (2009).
[11] Although the case of $R = 1$ is equivalent in terms of LP, it breaks the symmetry of $\rho_k(x)$ even in the trivial case of a globally symmetric potential.
[12] H. Yamamoto, K. Tsuji and K. Taniguchi, Phys. Stat. Sol. B **188**, 679 (1995).
[13] G. García-Calderón, Solid State Commun. **62**, 441 (1987); G. Garcia-Calderón and R. Peierls, Nucl. Phys. A **265**, 443 (1976).
[14] R. Renner, Nat. Phys. **3**, 645 (2007).
[15] D.J. Griffiths and C.A. Steinke, Am. J. Phys. **69**, 137 (2001).
[16] C. Morfonios, D. Buchholz and P. Schmelcher, Phys. Rev. B **80**, 035301 (2009).
[17] J.C. Hernández-Herrejón, F.M. Izrailev and L. Tessieri, J. Phys. A **43**, 4255004 (2010).
[18] O. Dietz, U. Kuhl, J. C. Hernández-Herrejón and L. Tessieri, New J. Phys. **14** 013048 (2012).